



**Cycle Storage, Racking  
and Security products**

**Shelford Design Ltd.**

P.O. Box 255, Chestfield,  
Whitstable, Kent, CT5 3XW

t: 07767 484 465 f: 01227 791 853

e: sales@tuskstore.com w: www.tuskstore.com

**BULL RACK**  
www.tuskstore.com

- Also available:
- TUSK Hook 'n' Hang vertical bike storage
  - TUSK Excel high security anchors
  - TUSK Modular bike storage systems
  - TUSK Multihanger overhead storage


For more details, see our website at [www.tuskstore.com](http://www.tuskstore.com)

**Product Information: BULL RACK 1 BIKE SUSPENDED/OVERHEAD Ceiling Mounted**

8

**Locations for use:** • Car/Bike Parks • Workplace and Business Premises • Basement Bike Store • Garages • Residential/Community areas

**Items Required:** • Bull Rack (B/Rack) Qty: 1 • Fixing Pack (BR/WMP) Qty: 2 • Fixing Pack (BR/TMP) Qty: 1 • Overhead Hanger (BR/OHH/C) Qty: 1

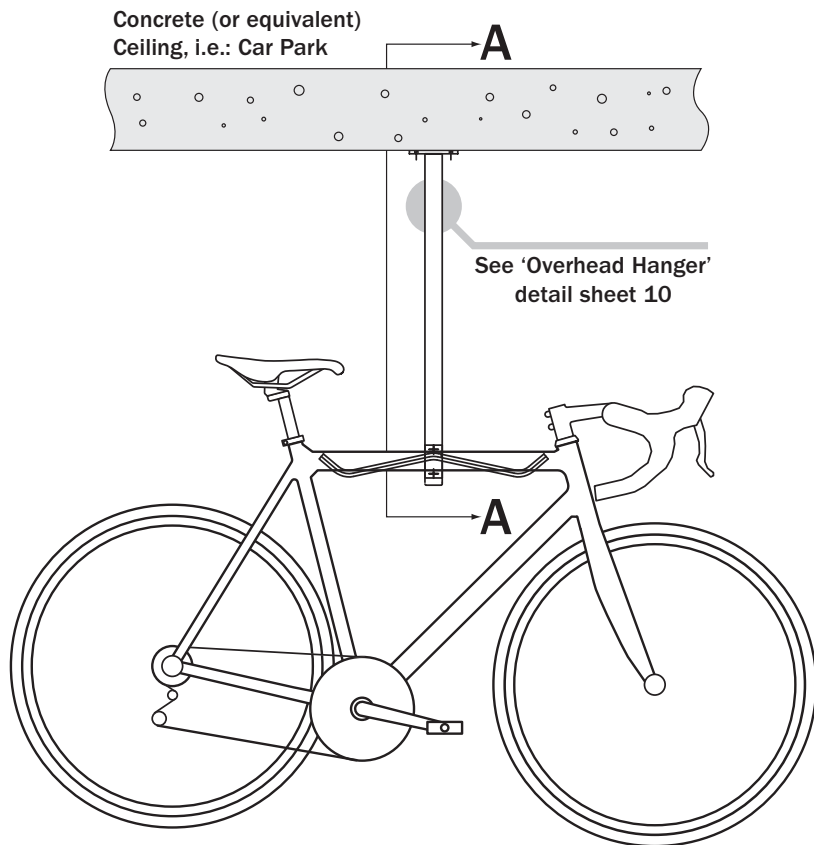

See 'Overhead Hanger' detail sheet 10

**WARNING**

**These fittings must only be installed by a competent installer**

**INSTALLATION:**

1. The Bull Rack bars support under the top tube of the bike. Position hanger plate to sound concrete only and with the hanger vertical about the ceiling. The vertical hanger can be reduced in length if so required.
2. **Caution: Wear suitable eye protection when drilling holes.**
3. Mark the fixing plate hole locations (4) and drill a 14mm diameter hole x 55mm deep at each location with a suitable masonry drill. Clean out the holes and insert Shield Anchors flush with ceiling. Assemble hanger to ceiling with bolts provided.
4. Assemble the Bull Rack with the 2 bolts supplied to the hanger with a washer under each nut. Use an M8 socket or box spanner to tighten. Do not overtighten bolts. Check both supports are level.
5. Tap into place over the head of each bolt a Hafren Armour Ring. Trim off any excess bolt thread protruding from the nut. Bond a black plastic domed cover over each nut.

If in doubt on any aspect contact us by email or call 07767 484 465.

